Est.Cost Rs 1150.00 Lakhs

Sanction No Job No-003-23-000003

Original/Duplicate/Triplicate

CONTRACT CERTIFICATE

(For Other Works)

No. 1st & Part Bill

Zone :BBMP, Yelahanka Zone

Sub-Project Division,Yelahanka

Bill Received No.....Dated.....Cash Book Voucher No.....Dated

Scheduled Doctet No. Head of Account: Amrutha Nagrothana grants

Name of Work:- PACKAGE No-03 Providing grill fencing and other developmental works at Sardara vallabai patel park, Sangolli rayanna park, Ambedkar park and Providing Gym & Children Play Equipments to Various Parks in Yelahanka Assembly Constituency Under Amrutha Nagarothana Grants

Name of Contractor and full Address: K Gopireddy, Class 1 Contractor Bangalore

Reference to Agreement No: EE(Project)/YNK Zone/WO/19/2022-23 date : 02-09-2022

Certified that the measurements were taken by me on 30/11/2022 and recorded in MB No 6380 03/22-25 pages 638001 to 638005 - the work is satisfactorily executed.

Contractor

Offider-in-charge of work

Certified that the measurements were taken by me on 30-11-2022 and found correct. The work is satisfactorily executed.

Certified that the quantities of materials shown in column 3 of Account II have been actually brought to site of the work and the contractor has not previously received any advance on this security.These materials are of an imperishable nature and are all required for immediate use on the work in connection with items for finished work have been agreed upon. A normal agreement signed and executed by the contractor is recorded in the office.

Sub Division Officer

Asst. Executive Engineer
Project Division
Yelahanka Zone
BBMP, Bangalore - 92

If Memorandum of Payment

1) Total value of work done or supplies made as per account within
2) Deduct amount to be held in reserve being.....percent Rs.....
3) " Balance
4)Deduct Payments
a) Amount of previous payment as in the Office Cash Book Voucher No .....Dated.....S.D.No.....
Amount Adjusted towards cash advance recovery of
b) Payments cost store or other materials supplied
Now made recovery of amount creditable to this/other work
Amount paid on this bill Cheque/Cash
5) Balance being unpaid value of work done held in reserve
6) Deduct Cash advance made on the Office Cash Book Voucher No.....
dated.....less adjustments
7) Net amount due to or from contractor
Unadjusted items
8) Advance to contractor for materials brought to site (as detailed) within value of Government materials supplied.

RA	8146980=00
IP	814700=00
ESI	702000=00
SEI	702000=00
GST	81500=00
deduct	8147000=00
AP	389900=00
	3497800=00
	7797200=00

Contractor's Signature

Received Rs ..... (in words) .....

by cash and by adjustment of payment as per memorandum.

Witnesses:

1

2

Stamp

Dated.....Signature of Contractor

Paid by me cheque No.....Dated

Cash Rs. ..... Dated

Initials of Officer making payment

(For use in the Office)

Head of Account P-3877

Audited & admitted for Rs. 8146980=00

7797200=00

.....by Cheque

Executive Engineer

and Rs. 3497800=00 by Adjustment

Accl. Clerk
Project Division

Accl. Supdt.
Project Division
B.B.M.P.

Exe. Engineer
Project Division
B.B.M.P

Scanned by TapScanner

BILL OF QUANTITIES

Sl. No.	Specifications	Unit	Approved BOQ Qty	Work Executed							Remarks
				Since Previous Bill		Present Bill			Upto Date Bill		
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount	
1	Demolishing R.C.C. work manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material to the appropriate disposal area as per direction of Engineer-in-charge. (V-II, P.No 163, I No.19.3 of PW, P&IWTD SR 2021-22)	Cum	77.60	-	-	72.80	2136.72	155553.22	72.80	155553.22	
2	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material to the appropriate disposal area.as per direction of Engineer-in-charge. In cement mortar (V-II, P.No.163, I.No.19.7.1 of PW, P&IWTD SR 2021-22)	Cum	19.96	-	-	0.00	907.41	0.00	0.00	0.00	
3	Dismantling dressed stone work ashlar face stone work, marble work or precast concrete work manually/ by mechanical means including stacking of serviceable and disposal of unserviceable material to the appropriate disposal area as per direction of Engineer-in-charge. (V-II, P.No-164, I No-19.10.1 of PWD SR 2021-22)	Cum	134.40	-	-	127.80	880.73	112556.41	127.80	112556.41	
4	Earth work excavation by manual means for drains,canals, waste weir, draft, approach channels, key trenches, foundation of bridges and such simillar works in all kinds of soils , as per drawing and technical specifications, including setting out, shoring, strutting, barricading, caution lights, removal of stumps and other deleterious matter, excavated surface leveled and sides neatly dressed disposing off the excavated stuff or sorting & stacking the selected stuff for reuse in a radius of 50 m and lift upto 1.5 m including cost of labour, tools & other appurtenaces required to complete the work.(V-I.No 1.4,Page No-5 of PWD SR 2021-22)	Cum	1412.13	-	-	841.71	214.07	180185.80	841.71	180185.80	
5	Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets Clause 1101.6. 1200mm dia (V-3, P.No-134, I No-20.16 A of PWD SR 2021-22)	Mtr	30.00	-	-	0.00	9384.98	0.00	0.00	0.00	
6	Providing and Filling in foundation with granite / trap broken metal 100mm and down size with approved M-Sand including hand packing, ramming, watering including cost of all materials and labour with all lead and lift complete as per specifications. (V-5, P.No-64, I No-9 A130A of PWD SR 2021-22)	Cum	23.88	-	-	0.00	1665.46	0.00	0.00	0.00	
7	Granular Aggregates, 53mm downsize (V-1, P.No- A 38, I No-8 of PWD SR 2021-22)	Cum	47.76	-	-	0.00	1437.47	0.00	0.00	0.00	
8	Granular Aggregates, 40mm downsize (V-1, P.No- A 38, I No-7 of PWD SR 2021-22)	Cum	23.88	-	-	0.00	1437.47	0.00	0.00	0.00	
9	Granular Aggregates, 20mm downsize (V-1, P.No- A 38, I No-4 of PWD SR 2021-22)	Cum	23.88	-	-	0.00	1552.56	0.00	0.00	0.00	
10	Sand - M-Sand –Fine (V-1, P.No- A 41, I No-71 of PWD SR 2021-22)	Cum	15.92	-	-	0.00	1711.11	0.00	0.00	0.00	
11	Providing and laying in position plain cement concrete for levelling course for all works in foundation. The granite/trap/basalt crushed graded coarse aggregates and fine aggregates as per relevant IS Codes machine mixed, laid in layers not exceeding 150 mm thickness, well compacted using plate vibrators, including all lead & lifts, cost of all materials of quality, labour, Usage charges of machineries, curing, and all the other appurtenances required to complete the work as per technical specifications. (The cost of steel reinforcement & formwork shall be paid separately)Mix 1:3:6 (M10) Using 40 mm nominal size graded crushed coarse aggregates (V-1, P.No-15, I No-2.1.3 of PWD SR 2021-22)	Cum	1648.98	-	-	806.12	6614.74	5332291.90	806.12	5332291.90	
12	Stones Providing Size Stone masonry (Available Stones) with hard stone in Foundation & Plinth with Cement Mortar 1:6 (1 Cement : 6 Coarse Sand) (Arrived Rate) Qty Upto 125%	Cum	67.20	-	-	84.00	4510.22	378858.48	84.00	378858.48	
	Qty above 125%					18.89	4510.22	85214.74	18.89	85214.74	

85198.00

NEWZEN CONSULTANTS ★ Bangalore ★

Scanned by TapScanner

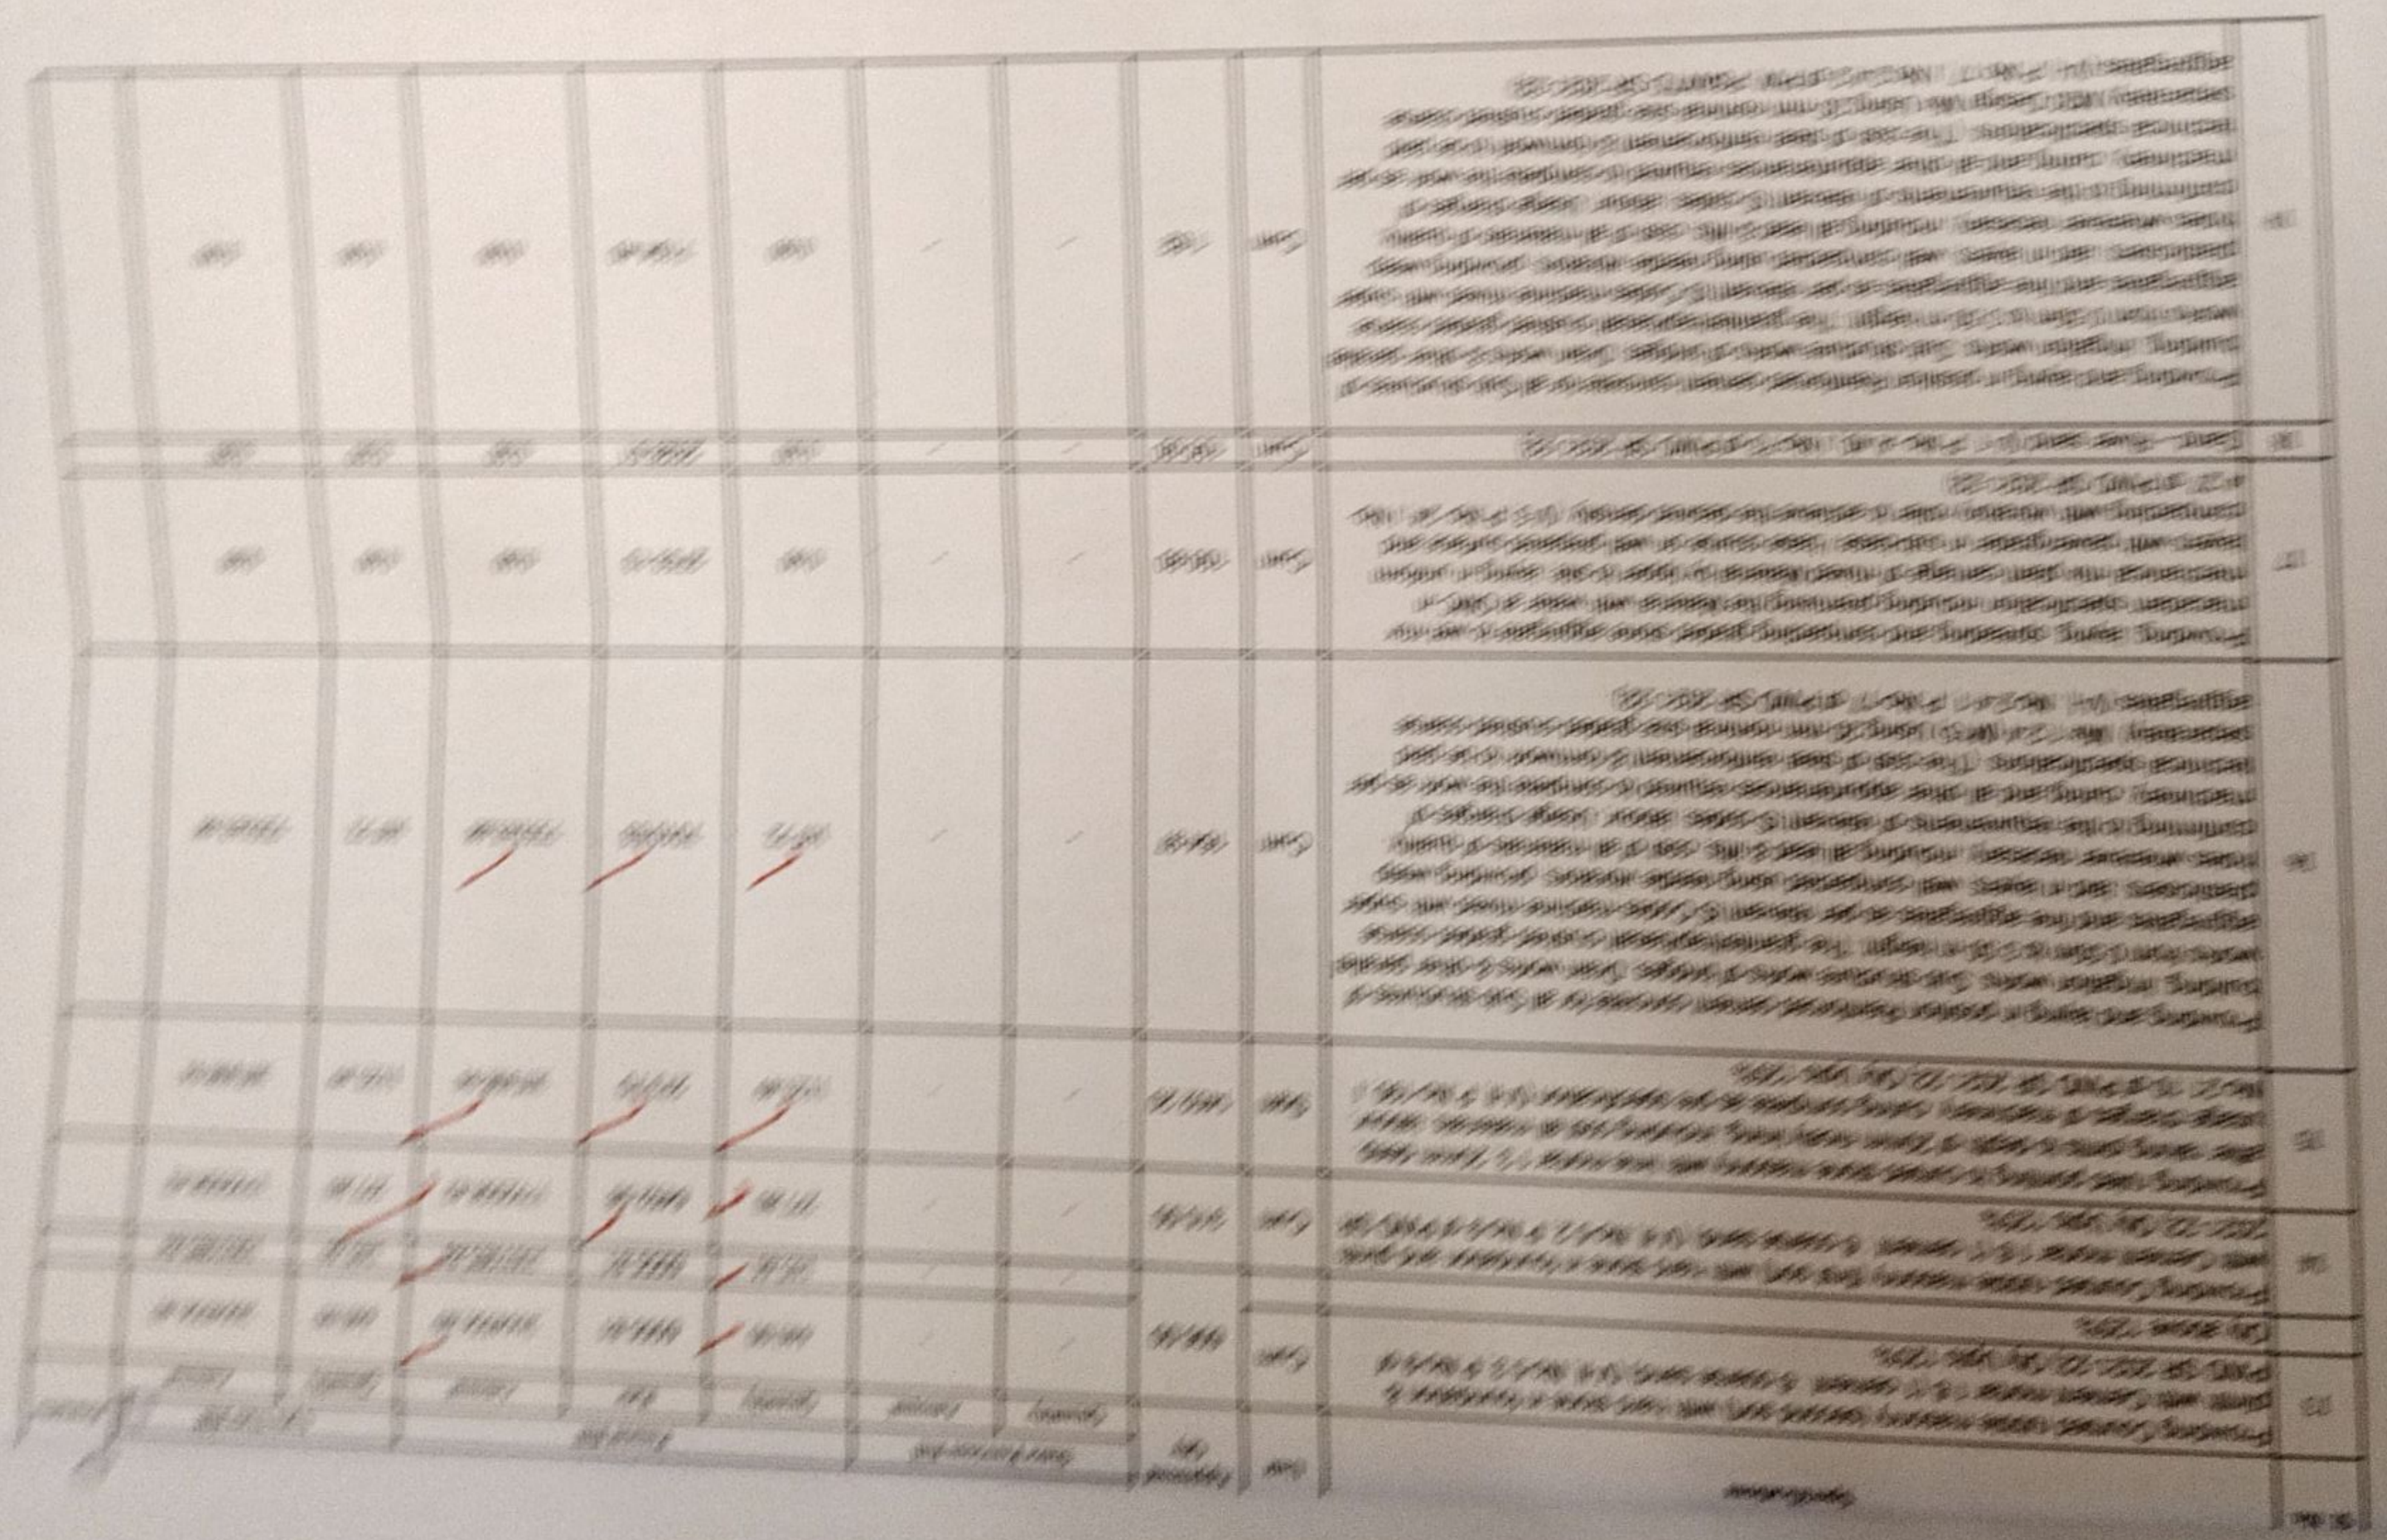

Scanned by TapScanner

Sl. No.	Specifications	Unit	Approved Qty	Since Previous Bill		Present Bill			Upto Date Bill		Remarks
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount	
20	Providing and laying in position Reinforced cement concrete for all Sub structures of building, Irrigation works, Sub structure works of bridges, Drain works & other parallel works from 0.50m to 3.50 m height. The granite/trap/basalt crushed graded coarse aggregates and fine aggregates as per relevant IS Codes machine mixed with super plasticisers, laid in layers, well compacted using needle vibrators, providing weep holes wherever necesary, including all lead & lifts, cost of all materials of quality, confirming to the requirements of relevant IS codes, labour, Usage charges of machinery, curing and all other appurtenances required to complete the work as per technical specifications. (The cost of steel reinforcement & formwork to be paid separately) M25 Design Mix Using 20 mm nominal size graded crushed coarse aggregates.(V-I, P.No.17, I.No.2.4.3 of PW, P&IWTD SR 2021-22)	Cum	84.00	-	-	0.00	7243.28	0.00	0.00	0.00	
21	Supplying, Fitting and Placing un-coated TMT bar Reinforcement in sub-structure complete as per Drawing and Technical Specifications.(V-III, P.No.99, I.No.13.1 of PW, P&IWTD SR 2021-22) Issuse Rate dated :07/04/2022	Tonne	0.83	-	-	0.00	118826.37	0.00	0.00	0.00	
22	Fabricating, providing and erecting in position of MS Hot Dip Galvanised Sq. Hallow Poles of 132 X 132 Heavy gauge of length 3000mm with MS. Hot dip Galvanised grill work as per approved design and drawing of chief architect. Using 12 X 75mm galvanised flat for alround frame and 20 X 20mm galvanised forged design with square for vertical at 150mm c/c as shown in the drawing including providing forged ornamental arrowhead at top and bottom. The work is inclusive of throughing flat, square rods, placing welding all the joints, including grinding, finishing 2 coats of anticorrosive paint over one coat of metal primer. The rate is inclusive of all materials like MS. Hollow galvanized pipe, flats, forged square rods, cost of labour for all items of work cost painting, welding, cutting, grinding with all lead and lift as per specification including loading and unloading with cost and conveyance of all materials, labour, machinery andincidental charges for the successful completion of the work as per the direction of the Engineer-in-charge of the work. (Data Rate) Qty Upto 125%	Sqm	3000.00	-	-	2629.13	16340.18	42960457.44	2629.13	42960457.44	
	Qty above 125%			-	-	363.19	16340.18	5934589.97	363.19	5934589.97	
23	Fabricating, providing and erecting in position Hot dip galvanised Gate. Using 72 X 72 X 4.8mm Sq. GI Pipe Frame with Top pipe bending in heavy duty hydraulic press with sand packing and hot bending to form double arch as per drawing profile, 20mm hot dip galvanised sq. rod for verticals at 150mm c/c, as shown in the drawing including providing hot dip galvanised forged ornamental design in between sq. rods and heads at top, middle and bottom. Intermediate supports of 75X12 mm and 50X6 mm arch bend to hot dip galvanised flats. The work is inclusive of throughing GI flat GI sq. rods, placing, welding all the joints including grinding, finishing metal putty, painting two coats enamel painting. The rate is inclusive of all materials like GI sq. pipe, GI sq. rods, GI forged designs etc., heavy duty hinges are made out of 75mm solid sq. block assembled with 20mm dia bearing in three places for each flop. Heavy Duty Locking arrangements at tow places including cost of labour, painting, erecting charges using hoist pulley cranes with all lead and lift, loading, transportation, unloading, scaffolding charges and all other incidental charges for successful completion of the work as per directions of the Engineer-in-charge of the work. (Data Rate)	Sqm	181.20	-	-	0.00	22319.75	0.00	0.00	0.00	
24	Removing and Resetting of Kerb Stones	Rmtr	1084.20	-	-	740.00	135.87	100543.80	740.00	100543.80	
25	Removing & Resetting of Cobble Stones	Sqm	1592.00	-	-	830.00	436.94	362660.20	830.00	362660.20	

NEWZEN CONSULTANTS ★ Bangalore ★

Scanned by TapScanner

Sl. No.	Specifications	Unit	Approved BOQ Qty	Since Previous Bill		Present Bill			Upto Date Bill		Remarks
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount	
26	Providing and fixing pre cast solid cement concrete kerb stones made out of M20 with top and bottom width 114 and 165 mm respectively, 400mm high and 450mm in length finished with CM 1:3 plastering and finishing cutting including formwork, curing, including cost of materials, labour charges of machinery, loading and unloading, lead and lift, transportation ete.,complete as directed by the Engineer in Charge of the work (Data Rate)	Nos	16041.00	-	-	5583.56	530.10	2959842.80	5583.56	2959842.80	
27	Painting two coats after filling the surface with synthetic enamel paint in all shades on new plastered concrete surfaces (P.No.56, I.No.8.10 of PW, P&IWTD SR 2021-22)	Sqm	2440.55	-	-	0.00	97.75	0.00	0.00	0.00	
28	Providing and laying heavy duty cobble stones 60mm thick interlock pavers, using cement and course sand for manufacture of blocks of approved size, shape and colour with a minimum compressive strength of 281 kg per m2 over 50mm thick sand bed (average thickness) and compacting with plate vibrator having 3 tons compaction force thereby forcing part of sand underneath to come up in between joints, final compaction of paver surface joints into its final level , including cost of materials, labour and Usage charges of machinery complete as per specifications.(V-II, P No.64, I.No.9.31of PW, P&IWTD SR 2021-22)	Sqm	4597.95	-	-	2508.36	1250.12	3135753.09	2508.36	3135753.09	
29	Providing, laying & fixing cement base, precast, pre polished cement concrete, designer tiles 25mm thick conforming to IS 1237 heavy duty tiles for flooring, treads of steps and landing, laid on a bed of 12mm thick cement mortar 1:3 mis finished with flush pointing using white cement, including cost of materials, mortar, including cutting, griding the edge to half/full round wherever required, labour, curing complete as per specification. (V-II, P.No 65, I.No.9.40 of PW, P&IWTD SR 2021-22)	Sqm	976.50	-	-	229.22	1309.85	300237.27	229.22	300237.27	
30	Executive Bench- Made out of Sadarahalli grey stone with hand supports with 3 line finishing with arch design with 100mm slabs. Height 90x Length 1500 width 45 cms (Data approved rate)	Nos	105.00	-	-	60.00	19027.04	1141622.40	60.00	1141622.40	
31	Basket ball poles with board inclusive of all taxes and transportation charges as per the direction of Engineer in Charge (Data approved rate)	Each	2.00	-	-	0.00	914757.21	0.00	0.00	0.00	
32	Supply and Fixing of Arm and Pedal Bike: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Horizontal Structural post of length 1.10 m supporting Upright structural posts of	Each	3.00	-	-	0.00	299909.71	0.00	0.00	0.00	

NEWZEN CONSULTANTS Bangalore

Scanned by TapScanner

Sl. No.	Specifications	Unit	Approved BOQ Qty	Since Previous Bill		Present Bill			Upto Date Bill		Remarks
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount	
33	Supply and Fixing of Bicycle. All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 1.31 m is to be schedule HOT DIP Galvanized steel with a 60 mm O.D. and	Each	3.00	-	-	0.00	220523.02	0.00	0.00	0.00	
34	Supply and Fixing of Big Shoulder Wheel: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 1.47 m is to be schedule HOT DIP Galvanized steel	Each	2.00	-	-	0.00	211701.09	0.00	0.00	0.00	
35	Supply and Fixing of Elliptical Cross Trainer: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 1.25 m is to be schedule HOT DIP Galvanized steel	Each	3.00	-	-	0.00	246983.95	0.00	0.00	0.00	

NEWZEN CONSULTANTS Bangalore

Scanned by TapScanner

		Unit	BOQ Qty	Since Previous Bill		Present Bill			Upto Date Bill		Remarks
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount	
36	Supply and Fixing of Leg Stretch: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 1.10 m is to be schedule HOT DIP Galvanized steel	Each	3.00	-	-	0.00	68873.67	0.00	0.00	0.00	
37	Supply and Fixing of Pull Down Challenger: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 1.88 m is to be schedule HOT DIP Galvanized steel	Each	3.00	-	-	0.00	417756.62	0.00	0.00	0.00	
38	Supply and Fixing of Seated Chest Press: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 1.88 m is to be schedule HOT DIP Galvanized steel	Each	3.00	-	-	0.00	405760.25	0.00	0.00	0.00	

NEWZEN CONSULTANTS Bangalore

Scanned by TapScanner

	Specifications	Unit	Approved BOQ Qty	Since Previous Bill		Present Bill			Upto Date Bill		Remarks
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount	
39	Supply and Fixing of Rider: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts	Each	2.00	-	-	0.00	158775.81	0.00	0.00	0.00	
40	Supply and Fixing of Self Weighted Rower: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Horizontal bars of length 1.26 m is to be schedule HOT DIP Galvanized steel with a	Each	2.00	-	-	0.00	291089.73	0.00	0.00	0.00	
41	Supply and Fixing of Tai Chi Spinners: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 1.15 m is to be schedule HOT DIP Galvanized steel	Each	2.00	-	-	0.00	202880.13	0.00	0.00	0.00	

NEWZEN CONSULTANTS ★ Bangalore ★

Scanned by TapScanner

Sl. No.	Specifications	Unit	Approved BOQ Qty	Work executed								Remarks
				Since Previous Bill		Present Bill			Upto Date Bill			
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount		
42	Supply and Fixing of Sit Up Station: All products must tested and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 0.63 m is to be schedule HOT DIP Galvanized steel	Each	2.00	-	-	0.00	220522.05	0.00	0.00	0.00	
43	Supply and Fixing of Squat Pushing: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Vertical bars height of 1.70 m is to be schedule HOT DIP Galvanized steel with a	Each	2.00	-	-	0.00	379297.37	0.00	0.00	0.00	
44	Supply and Fixing of Double Health Walker: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 1.25 m is to be schedule HOT DIP Galvanized steel	Each	3.00	-	-	0.00	417756.13	0.00	0.00	0.00	

NEWZEN CONSULTANTS Bangalore

Scanned by TapScanner

Sl. No.	Specifications	Unit	Approved BOQ Qty	Since Previous Bill		Present Bill			Upto Date Bill		Remarks
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount	
45	Supply and Fixing of Mini Ski: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 1.40 m is to be schedule HOT DIP Galvanized steel with a 114mm O.D. and	Each	3.00	-	-	0.00	280998.02	0.00	0.00	0.00	
46	Supply and Fixing of Waist Twister: All products must test and certified to meet EN16630 safety standards with GS test mark. The EN16630 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The GS mark-EN 16630 certificates must be in the name of the supplier by themselves or through their authorized dealers or contractors. The suppliers products must have been installed in at least 200 public parks across India the list of which to be submitted during the technical bid. Any five parks will be randomly selected by the tendering authority or a third party appointed by it to check and ascertain the product GS Marks, safety, quality and durability at site, the evaluation report to have photographs of the installed products taken at site showing the GS mark and the condition of the equipment, based upon which the tender shall be evaluated. The EN16630 & GS Mark certificates must be submitted during the technical bid and the same must reflect clearly on the notified certifying bodies websites as online verification is mandatory during technical bid. All products must clearly display the GS mark as has been issued in the EN16630 safety certificates. Upright structural posts of height 1.35 m is to be schedule HOT DIP Galvanized steel	Each	3.00	-	-	0.00	229343.01	0.00	0.00	0.00	
47	Supply and Fixing of Maxima N Swing: All products must be tested and certified to meet EN 1176 safety standards. The EN 1176 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The EN 1176 certificates must be in the name of a supplier who has carried out in excess of at least 100 public park projects in India either by themselves or through their dealers or contractors. These EN 1176 certificates must be clearly displayed on the notified certifying bodies websites as online verification is mandatory. Inverted U shaped structural posts of height 2.31 m are to be schedule HOT DIP Galvanized steel with a 114mm OD and 2.2mm (wall) thickness of the tubing. Toprail at height 2.31 m and Dia 114 mm shall be an all-robotic welded unit, fabricated from 114 O.D. Plastic Components such as swing seats [super thick plastic] shall be animated and shall be rotationally molded from antistatic, copolymer, virgin linear low density UV stabilized polyethylene, with color molded in and minimum thickness of 6 - 8mm. The rates are inclusive of all taxes, transportation charges and installation. PLAY EQUIPMENT DIMENSIONS: 3.67 m x 1.39 m x 2.31 m	Each	2.00	-	-	0.00	346735.87	0.00	0.00	0.00	

NEWZEN CONSULTANTS Bangalore

Scanned by TapScanner

Sl. No.	Specifications	Unit	Approved BOQ Qty	Work Executed								Remarks
				Since Previous Bill		Present Bill			Upto Date Bill			
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount		
48	Supply and Fixing of Fiero A Swing. All products must be tested and certified to meet EN 1176 safety standards. The EN 1176 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The EN 1176 certificates must be in the name of a supplier who has carried out in excess of at least 100 public park projects in India either by themselves or through their dealers or contractors. These EN 1176 certificates must be clearly displayed on the notified certifying bodies websites as online verification is mandatory. Shaped structural posts of height 2.31 m are to be schedule HOT DIP Galvanized steel with a 114mm OD and 2.2mm (wall) thickness of the tubing. Plastic Components such as swing seats [super thick plastic] shall be animated and shall be rotationally molded from antistatic, copolymer, virgin linear low density UV stabilized polyethylene, with color molded in and minimum thickness of 6 - 8mm. The rates are inclusive of all taxes, transportation charges and installation. PLAY EQUIPMENT DIMENSIONS: 3.21 m x 1.54 m x 2.50 m	Each	2.00	-	-	0.00	250309.89	0.00	0.00	0.00	
49	Supply and Fixing of 4 Seater See Saw: All products must be tested and certified to meet EN 1176 safety standards. The EN 1176 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The EN 1176 certificates must be in the name of a supplier who has carried out in excess of at least 100 public park projects in India either by themselves or through their dealers or contractors. These EN 1176 certificates must be clearly displayed on the notified certifying bodies websites as online verification is mandatory. The See Saw consists of 2 poles of Dia 114mm and thickness of 2.5mm which balances the horizontal rod at the center which is of size 3110 mm length and Dia 114 mm. It consists of 4 seats which is made of LLDPE virgin plastic of size 305mm X 213 mm X 125 mm. PLAY EQUIPMENT DIMENSIONS: 3.10 m x 0.44 m x 0.80 m	Each	2.00	-	-	0.00	214366.73	0.00	0.00	0.00	
50	Supply and Fixing of 2 Seater See Saw: All products must be tested and certified to meet EN 1176 safety standards. The EN 1176 certificates must be issued by a reputed notified International Certifying Body such as IPEMA, TUV, CPSC, or SGS only. The EN 1176 certificates must be in the name of a supplier who has carried out in excess of at least 100 public park projects in India either by themselves or through their dealers or contractors. These EN 1176 certificates must be clearly displayed on the notified certifying bodies websites as online verification is mandatory. The See Saw consists of 2 poles of Dia 114mm and thickness of 2.5mm which balances the horizontal rod at the center which is of size 3110 mm length and Dia 114 mm. It consists of 2 seats which is made of LLDPE virgin plastic of size 305mm X 213 mm X 125 mm. The rates are inclusive of all taxes, transportation charges and installation. PLAY EQUIPMENT DIMENSIONS: 3.11 m x 0.44 m x 0.66 m	Each	2.00	-	-	0.00	162646.23	0.00	0.00	0.00	

NEWZEN CONSULTANTS Bangalore

Scanned by TapScanner

Sl. No.	Specifications	Unit	Approved BOQ Qty	Work Executed								
				Since Previous Bill		Present Bill			Upto Date BOQ		Remarks
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount	
51	Supply and fixing of children Multi Play Equipment SCARBROUGH (KPS-1434-E-PVC) with curved slide and number panel. The equipment comprises of 2 numbers of Upright structural posts of height 2.4 m, 2 numbers of Upright structural posts of height 2.7 m, 2 numbers of Upright structural posts of height 3.3 m and 4 numbers of Upright structural posts of height 3.9 m are to be schedule HOT DIP Galvanized steel with a 114mm OD and 2.2mm thickness of the tubing. 6 numbers of Deck of size 1.14 x 1.14 m and Staircase of size 1.5m x 0.77 m are fabricated from 2mm perforated solid punched steel. Decks are pre pressed, punched, and welded, powder coated to 2.2mm thickness or vinyl plastic coated to a thickness of 4mm. Handrail of height 2.2 m and Dia 32 mm. Top rails of Monkey loop of size 1.8 m x 1.3 m. Sun Roof of size Dia 2 m and height 0.82 m, Spiral Slide of size 1.16 m x 1.6 m x 3.6 m, L - Curved Slide of size 1.94 m x 1.85 m x 2.4 m, Panels with color molded in and minimum thickness of 6 - 8mm. The supplier must have carried out in excess of at least 100 public park projects in India either by themselves or through their dealers or contractors. The rates are inclusive of all taxes, transportation charges and installation. ALL COMPONENTS MEET WITH EN-1176 SAFETY STANDARDS	Each	2.00	-	-	0.00	4309578.54	0.00	0.00	0.00	
52	Supply and fixing of children Multi Play Equipment BRIGHTON (KPS-1427-PVC) with curved slide, tunnel and side panels. The equipment comprises of 2 numbers of Upright structural posts of height 2.2 m, 4 numbers of Upright structural posts of height 2.4 m, 4 numbers of Upright structural posts of height 2.7 m, 4 numbers of Upright structural posts of height 2.8 m, 2 numbers of Upright structural posts of height 3.0 m and 4 numbers of Upright structural posts of height 4.5 m and 2.2mm thickness of the tubing. 7 numbers of Deck of size 1.14 x 1.14 m, Staircase of size 1.74m x 1.32 m and Impending stairs of size 0.80 m x 0.60 m and 1.05 m x 0.68 m are fabricated from 2mm perforated solid punched steel. Decks are pre pressed, punched, and welded, powder coated to 2.2mm thickness or vinyl plastic coated to a thickness of 4mm. Monkey loop climber 1.87 m x 1.15 m x 0.6 m which has thickness of 48 mm curved bar. Crab Roof of size 2.00 m x 1.78 m, Spiral tube Slide of size 3.2 m x 1.82 m x 2.7 m, Triple Slide of size 3.95 m x 2.93 m x 1.80 m, L - curved Slide of size 1.7 m x 1.8 m x 1.2 m, Double Slide of size 2.3 m x 1.4 m x 1.2 m Panels with color molded in and minimum thickness of 6 - 8mm. The supplier must have carried out in excess of at least 100 public park projects in India either by themselves or	Each	1.00	-	-	0.00	6905711.02	0.00	0.00	0.00	
53	Providing and fixing of Black Granite Slab board of size 1350 x600x30mm fixed in granite poles of size 150 * 150 * 3000mm. The poles shall be embedded in the ground for a depth of 500mm with 1:1.5:3 ratio cement concrete. The board shall be fixed as per the drawing and at the place indicated by the Engineer in charge of the work. The cost includes excavation, bare cost of all materials, cost of steel, centering, transportation charges, fixing charges, labour, drawings and directions of the Engineer in charge of the work. (Data Rate)	Each	10.00	-	-	0.00	57499.48	0.00	0.00	0.00	

NEWZEN CONSULTANTS Bangalore

Scanned by TapScanner

Sl. No.	Specifications	Unit	Approved BOQ Qty	Work Executed							Remarks
				Since Previous Bill		Present Bill			Upto Date Bill		
				Quantity	Amount	Quantity	Rate	Amount	Quantity	Amount	
54	Supply and fixing of Retro Reflective Single Arrow Road Name Signboard of size 1600mm x 900mm made out of retro reflective sheeting conforming to Type XI standards of ASTM D 4956 - 09 & as per IRC 67-2012 for full back ground of blue colour & white letters and fixed over 4 mm thick Aluminium Composite Material sheet having minimum 0.5 mm thick Aluminium skin on both sides with back side painted grey colour and fixed over back support frame SS angle of 15mm x 20mm x 1.2mm, supported by 38mm OD stainless steel pipe all round in 304 grade and 2 nos of vertical posts of 50 mm OD stainless steel pipe of 202 grade firmly fixed to the ground by means of properly designed foundation of size 450mm x 450mm x 600mm in 1:1.5:3 ratio cement concrete. The background shall be blue in color with letters and border in white, the item includes earthwork excavation, cost of all materials, loading, unloading, lead, lift, transportation etc., complete. as per direction of engineer in charge of work clause 6.9 of IRC 67-2012 for Type XI retro reflective sheeting from the sheeting manufacturer & a certified copy of test reports from an independent test laboratory conforming to clause 6.7 of IRC 67-2012 including outdoor weather exposure report for the retro reflective sheeting offered shall be submitted by the	Each	10.00	-	-	0.00	39726.58	0.00	0.00	0.00	
55	Supply and fixing of Retro Reflective Double Arrow road name sign board of size 2000mm x 900mm made out of retro reflective sheeting conforming to Type XI standards of ASTM D 4956 - 09 & as per IRC 67-2012 for full back ground of blue colour & white letters and fixed over 4 mm thick Aluminium Composite Material sheet having minimum 0.5 mm thick Aluminium skin on both sides with back side painted grey colour and fixed over back support frame SS angle of 15mm x 20mm x 1.2mm, supported by 38mm OD stainless steel pipe all round in 304 grade and 2 nos of vertical posts of 50 mm OD stainless steel pipe of 202 grade firmly fixed to the ground by means of properly designed foundation of size 450mm x 450mm x 600mm in 1:1.5:3 ratio cement concrete. The background shall be blue in color with letters and border in white, the item includes earthwork excavation, cost of all materials, loading, unloading, lead, lift, transportation etc., complete. as per clause 6.9 of IRC 67-2012 for Type XI retro reflective sheeting from the sheeting manufacturer & a certified copy of test reports from an independent test laboratory conforming to clause 6.7 of IRC 67-2012 including outdoor weather exposure report for the retro reflective sheeting offered shall be submitted by the contractor for technical qualification in the tender	Each	6.00	-	-	0.00	45999.20	0.00	0.00	0.00	
56	SS Dustbin with MS pole 3ft	Each	5.00	-	-	0.00	18295.18	0.00	0.00	0.00	
57	Twin Dustbin with MS pole 3ft	Each	7.00	-	-	0.00	19758.70	0.00	0.00	0.00	
58	Fibre Dustbin modern type, Monkey Dustbin 3.75 ft	Each	8.00	-	-	0.00	19027.04	0.00	0.00	0.00	
59	Fibre Dustbin modern type, Penguin Dustbin 3 ft	Each	5.00	-	-	0.00	19183.73	0.00	0.00	0.00	
60	Fibre Dustbin modern type, Hippo Dustbin 3.75 ft	Each	5.00	-	-	0.00	18974.74	0.00	0.00	0.00	
61	Fibre Dustbin modern type, Rabit Dustbin 3.75 ft	Each	4.00	-	-	0.00	18870.64	0.00	0.00	0.00	
62	Loading and Unloading of Stone Boulder/Stone aggregates/ Sand/Kankar/Moorum. (Tipper 5.5 m3) (V-III Page No.3, Item No.1.1 A of PWD SR 2021-22)	Cum	1644.09	-	-	2103.72	136.00	286106.41	2103.72	286106.41	
63	Cost of Haulage Excluding Loading and Unloading Taking output 10 t load and lead 10 km = 100 t.km (V-III Page No.3, Item No.1.4 A of PWD SR 2021-22) Lead 8 Km	Cum	2104.44	-	-	2103.72	112.00	235617.05	2103.72	235617.05	
	TOTAL							70183854.28		70183854.28	
	Add GST 18% for SR Items							12633093.77		12633093.77	
	TOTAL							82816948.05		82816948.05	

NEWZEN CONSULTANTS Consultant Bangalore

Assistant Engineer

Asst. Executive Engineer

Executive Engineer

Scanned by TapScanner